



Air Screwdrivers



Air Impact Wrenches

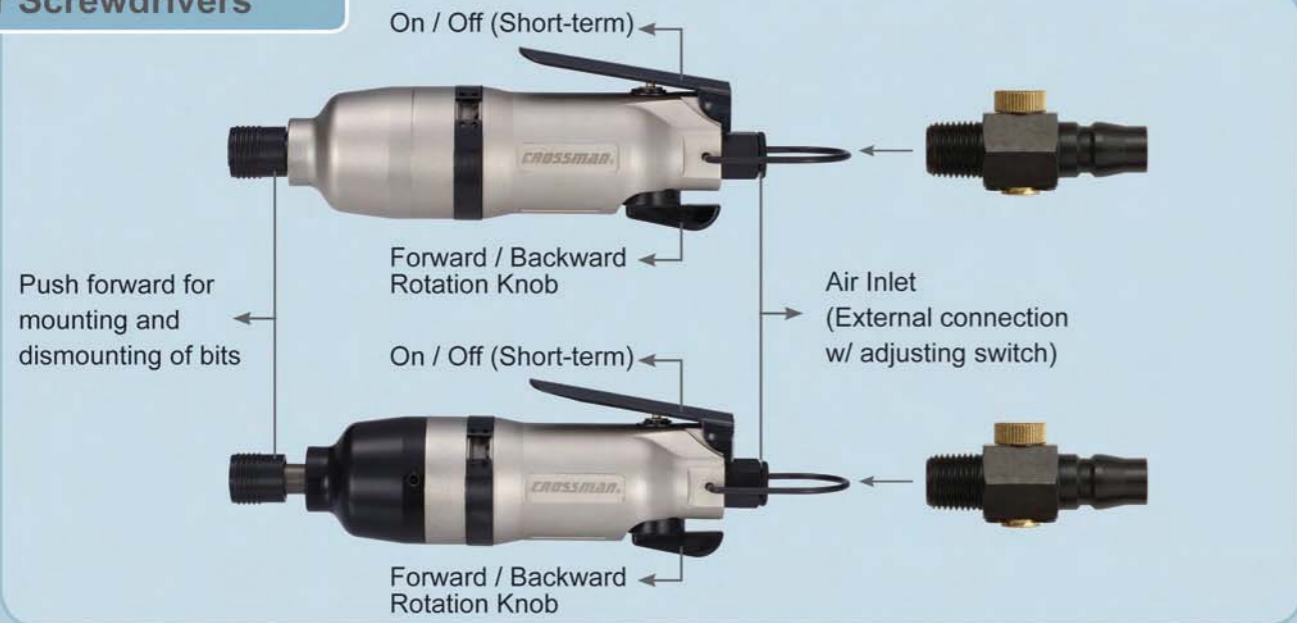


Air Die Grinders

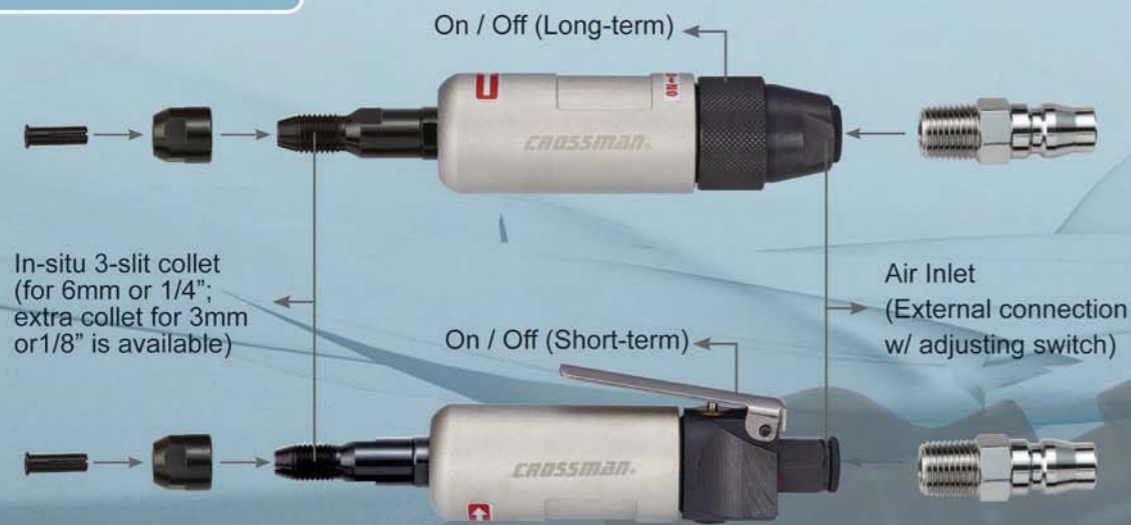

Air Die Grinders / Air Impact Wrenches / Air Screwdrivers

www.crossmancorp.com

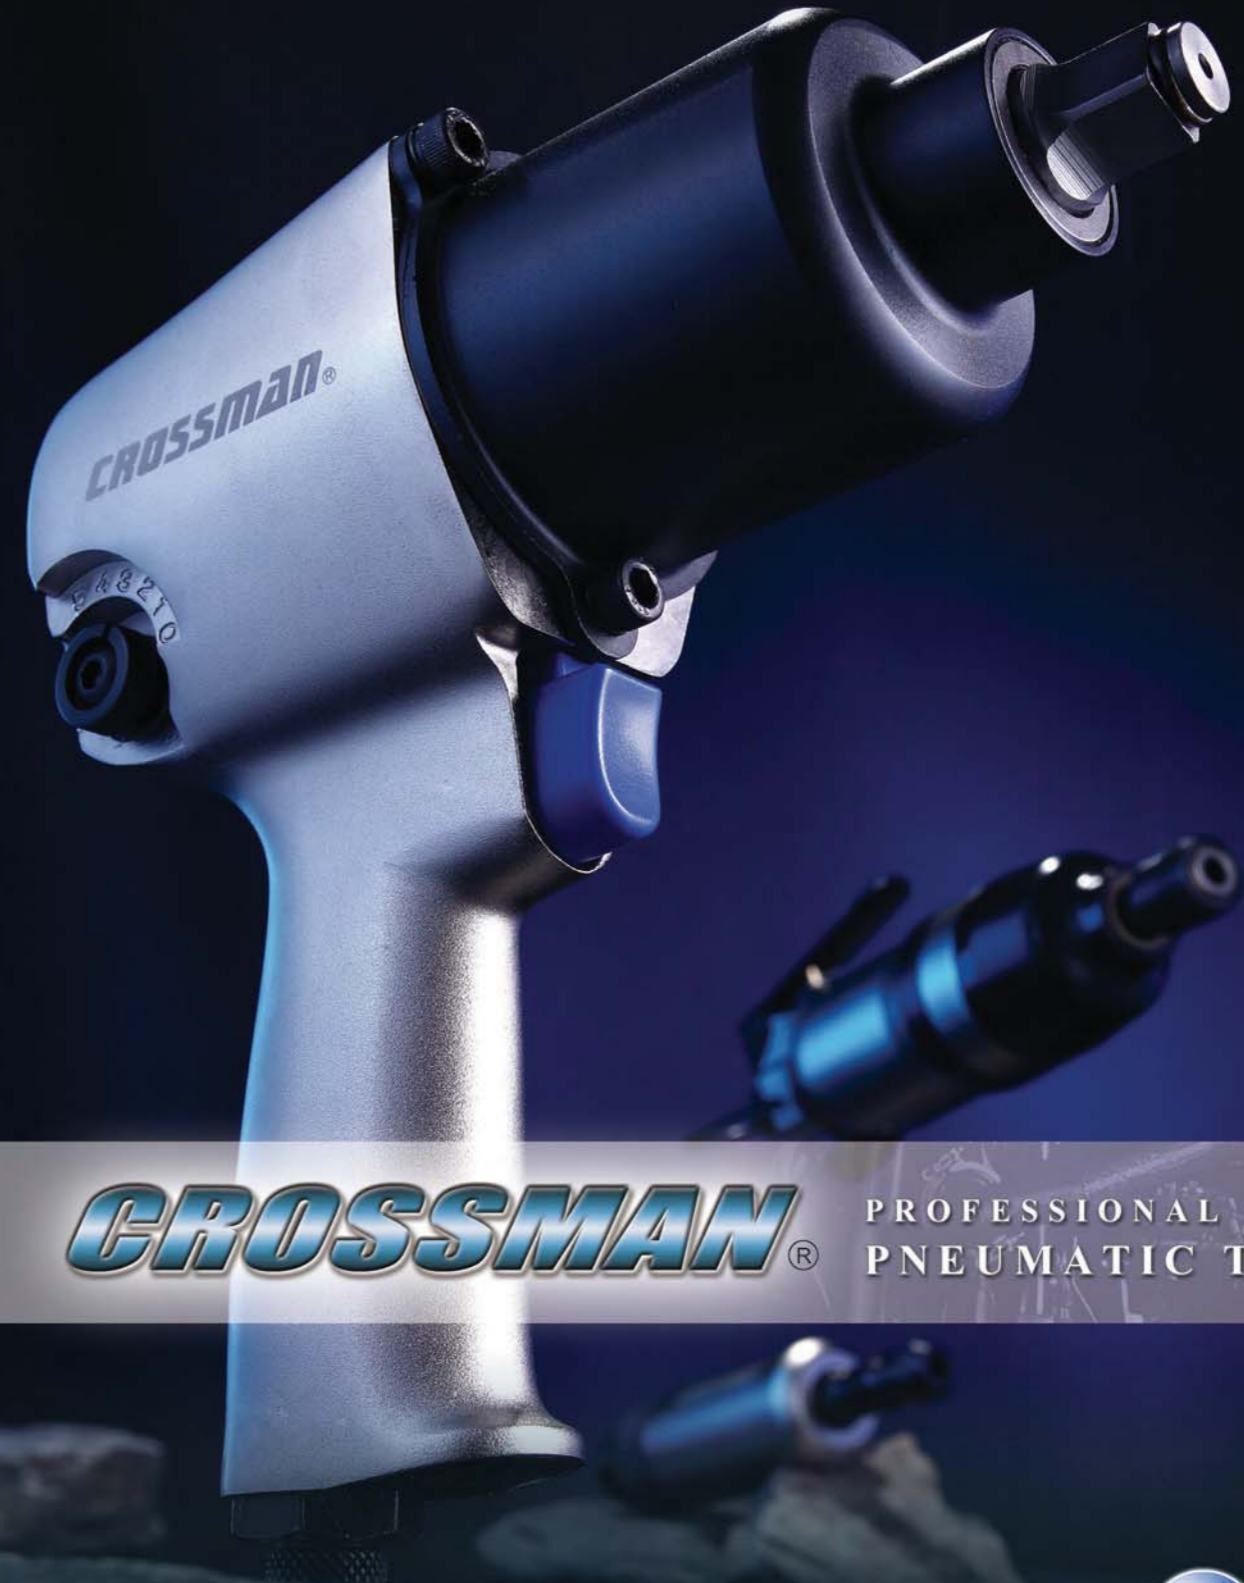

CROSSMAN®

PROFESSIONAL PNEUMATIC TOOLS



CROSSMAN®



Air Screwdrivers



Item No.- 70-807

Specifications-

Impact Mechanism:

Double rocking dog impact
Retainer Capacity: 6-10 mm
Working Torque Range: 8-45 ft.lb
Blow Per Minute@90psi: 1600-1800 BPM
Free Speed@90psi: 8500 r.p.m.
Operation: level start
Air Inlet Thread: 1/4" NPT
Minimum Hose Size: 3/8"

Description-

Net Weight: 1.1 kg / pc
N.W.: 22 kg / ctn
G.W.: 23 kg / ctn
CUFT: 1.1 / ctn
Packing- 1pc / Inner box, 20 pcs / ctn



Air Impact Wrenches



Item No.- 71-809

Specifications-

Square Drive: 1/2"
Impact Mechanism: Twin Hammer Impact
Working Torque Range@90psi: 200-330 ft.lb
Maximum Endured Working Pressure: 256 psi (18.0 kg/cm²)
Maximum Torque (after 30 seconds@90psi): 500 ft.lb
Free Speed@90psi: 7200 r.p.m.
Air Inlet Thread: 1/4" NPT
Minimum Hose Size: 3/8"
Noise Value: 93 db
Average Air Consumption: 16.8 C.F.M
Air Exhaust: Handle Exhaust

Description-

Net Weight: 2.65 kg / pc
N.W.: 13.5 kg / ctn
G.W.: 14.5 kg / ctn
CUFT: 0.92 / ctn
Packing- 1pc / Inner box, 5 pcs / ctn



Air Die Grinders



Item No.- 71-903

Specifications-

Retainer Capacity: 6 mm (3 mm available)
1/4" (1/8" available)
Free Speed@90psi: 18000 r.p.m.
Operation: switch start
Air Inlet Thread: 1/4" NPT
Minimum Hose Size: 3/8"

Description-

Net Weight: 0.65 kg / pc
N.W.: 13 kg / ctn
G.W.: 14 kg / ctn
CUFT: 1.1 / ctn
Packing- 1pc / Inner box, 20 pcs / ctn



Item No.- 70-808

Specifications-

Impact Mechanism:

Twin Hammer impact
Retainer Capacity: 6-10 mm Hex
Working Torque Range: 8-50 ft.lb
Blow Per Minute@90psi: 1200-1400 BPM
Free Speed@90psi: 8500 r.p.m.
Operation: level start
Air Inlet Thread: 1/4" NPT
Minimum Hose Size: 3/8"

Description-

Net Weight: 1.1 kg / pc
N.W.: 22 kg / ctn
G.W.: 23 kg / ctn
CUFT: 1.1 / ctn
Packing- 1pc / Inner box, 20 pcs / ctn



Item No.- 71-808

Specifications-

Square Drive: 1"
Impact Mechanism: Pin-less
Bolt Capacity: 2"
Free Speed@90psi: 2500 r.p.m.
Impact Per Minute: 480 i.p.m.
Maximum Torque (Reverse Bias): 2600 ft.lb
Air Inlet Thread: 1/2" NPT or PT
Overall Length: 599 mm (23-5/8")
Average Air Consumption: 31.70 C.F.M
Required Hose Size: 1/2"

Description-

Net Weight: 15.6 kg / pc
N.W.: 15.6 kg / ctn
G.W.: 17.6 kg / ctn
CUFT: 1.2 / ctn
Packing- 1pc / ctn



Item No.- 71-904

Specifications-

Retainer Capacity: 6 mm (3 mm available)
1/4" (1/8" available)
Free Speed@90psi: 18000 r.p.m.
Operation: level start
Air Inlet Thread: 1/4" NPT
Minimum Hose Size: 3/8"

Description-

Net Weight: 0.65 kg / pc
N.W.: 13 kg / ctn
G.W.: 14 kg / ctn
CUFT: 1.1 / ctn
Packing- 1pc / Inner box, 20 pcs / ctn